

STEP 2 - INSTALL YOUR NEW FILTER:

6. Pull the 2 x blue rubber plugs out from the new filter cartridge.
7. Write the date of installation onto the label of the new filter cartridge (E).
8. **Firmly** push the blue pipe (C) into filter fitting (D). Note you may wish to gently 'tug' the pipe (C) to check it is secure.
9. Repeat the process to insert blue pipe (H) into fitting (G). Ensure the filter inlet (G) and outlet fittings (D) are connected to the correct blue pipes, respecting the direction of flow arrow marked on the body of the filter (E).
10. Clip the filter (E) back into its bracket (F).
11. Turn your mixer tap (A) to the off (upright) position.
12. Turn the lever on the isolator (B) to the open position (fig 3.)
13. Now carefully check the entire system thoroughly for any leaks. If possible return to the installation after a longer period to double check for slower leaks.

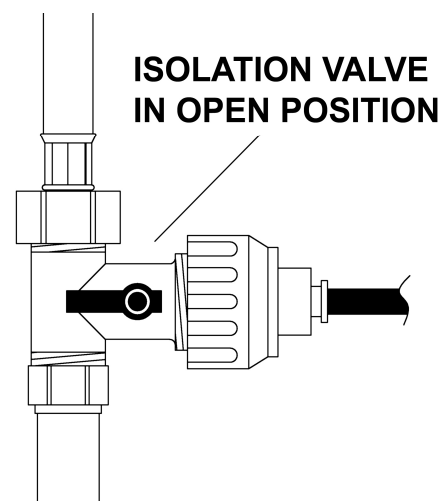


Fig 3.

STEP 3 – SET THE FLOW RATE:

Turn your mixertap handle (A) backwards again so filtered water runs through it. When the filter (E) is new it will take a moment to push any air through the system, so water may not appear instantly. You may notice some black discoloration in the water at this point, this is loose carbon, it is normal and harmless and will pass with further flushing.

The filtered drinking water system performs at a maximum of 2-3 L / min depending upon the quality of your water. Turn the blue lever on the three way valve (B) to adjust the flow of filtered water to the appropriate flow rate, this can be checked using a kitchen measuring jug for example 1 litre should take 20-30 seconds.

IMPORTANT TECHNICAL DATA:

These installation instructions have been prepared for your guidance and you must exercise due care at all times. We do not accept responsibility for problems that may occur through improper installation, The installation should be periodically checked for damage, if the property is left unattended for a prolonged period we recommend isolating water supplies.

We do not accept responsibility for problems that may occur through improper installation, do not over tighten connections or allow pipes to be twisted, worn or folded.

These installation guidelines have been prepared for your direction and you must exercise due care at all times. Turn off the tap and check carefully for any leaks around all connections on the fitting and adjoining plumbing.

For use only with a microbiological safe potable drinking water supply. Note the filter performs best if mounted vertically.

If in doubt, ensure that the Mixertap is fitted & serviced by a trained and certified plumber. Please ensure that your kitchen mixer is fitted in accordance with Local Water Bye-laws.

Recommended Min/Max Cold Water Pressure: 0.75 – 5.5 bar

For replacement filters please call 01226 283434 or visit www.filter-taps.co.uk/howdens.html